





RZ26L™ Disk Drive Data Sheet

EK-RZ26L-IS. A01

February, 1994

To install the RZ26L disk drive, refer to any section in your system documentation that explains how to install an RZ™-series hard disk drive. The installation procedure is the same for all RZ-series hard disk drives.

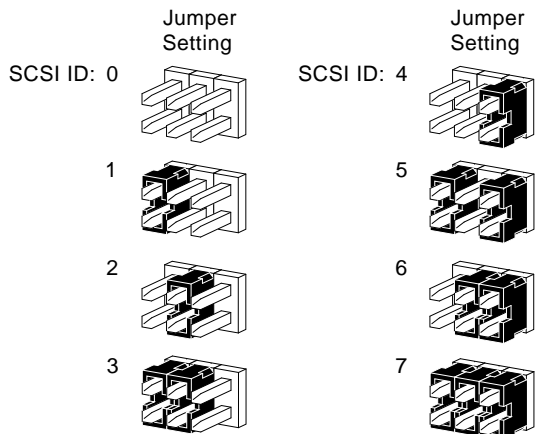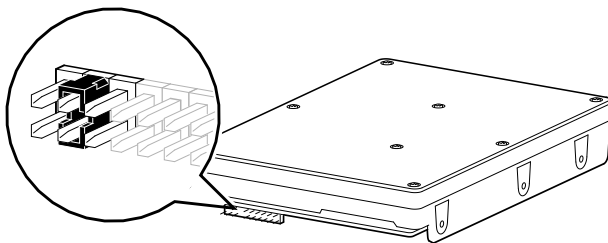

MLO-012101

Table 1 RZ26L Disk Drive Specifications

Weight	Height	Width	Depth
0.49 kg (1.08 lb)	2.54 cm (1.00 in)	10.2 cm (4.00 in)	14.6 cm (5.75 in)
Drive Formatted Storage Capacity			
Bytes per drive	1.05 GB (formatted)		
Bytes per surface	75 MB		
Bytes per track	29,640		
Buffer size	512 KB		
Drive Performance			
Data transfer rate to/from media	2.7-5.5 MB/sec		
Seek time track to track	1 msec		
Seek time average	9.5 msec		
Seek time maximum (full stroke)	≤ 20 msec		
Average latency	5.6 msec		
Rotational speed	5400 rpm		
Interleave ratio	1:1		
Drive Operating Conditions			
Ambient temperature	5°C to 55°C (41°F to 131°F)		
Relative humidity	10%–90% non-condensing		
Maximum wet bulb	32°C (90°F)		
Temperature gradient	20°C (36°F) per hour		
Drive Nonoperating Conditions			
Ambient temperature	–40°C to 66°C (–40°F to 151°F)		
Relative humidity	8%–95% (noncondensing)		
Maximum wet bulb	46°C (115°F)		
Temperature gradient	30°C (55°F) per hour		

© Digital Equipment Corporation 1994. All rights reserved.

S2461